

Jet Europe BV supplies unique plate processing systems for quick and easy manufacturing of water Flexo photopolymer plates. All plate processing equipment is based on the latest processing techniques available today. It meets the needs of even the most .


Przedstawiciel w Polsce: Barmey Wojciech Barabasz,  
ul. Karola Miarki 41, 58-500 Jelenia Góra, tel. 75 75 527 37, email: [biuro@barmey.eu](mailto:biuro@barmey.eu), [www.barmey.eu](http://www.barmey.eu)

## FLEXO WATER **COMBI FLW 25/30**




## COMBI FLW 25/30

- \* Simultaneous processing system of the whole plate surface
- \* Pre and main exposure with pump and vacuum gauge
- \* Fastening section on a table with permanent sticky plate
- \* Washout with an orbital and alternating movement. Independent movement of the table
- \* Post-exposure, finishing and dryer section with leds informing the state of lamps
- \* Dryer separated by a special material which allows the lamp temperature maintenance at 45 degrees
- \* 9 channel touch screen controller: pre-exp. time – main exposure time – washout time – post- exp. time – finishing – dryer time
- \* Water and dryer section temperature control
- \* Detergent doser pump
- \* Sand filtration system

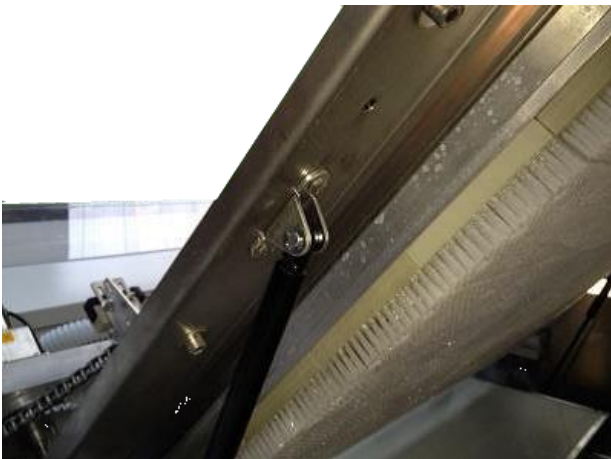

## COMBI FLW 25/30

	25/30
Plate format mm	635x762
Quantity developer in tank (l)	110
Exposure lamp UVA	N.13 60W 10R L. 900
Post-exposure lamp UVA	N.12 60W 10R L. 900
UVC lamp	N.11 30W L. 900
Maximum thickness processable mm	3,94
Wattage kW	16
Electrical supply	230V (3PH+GND) 60Hz 400V (3PH+N+GND) 50Hz
Overall size (LxWxH) cm	126x210x110
Weight kgs	260

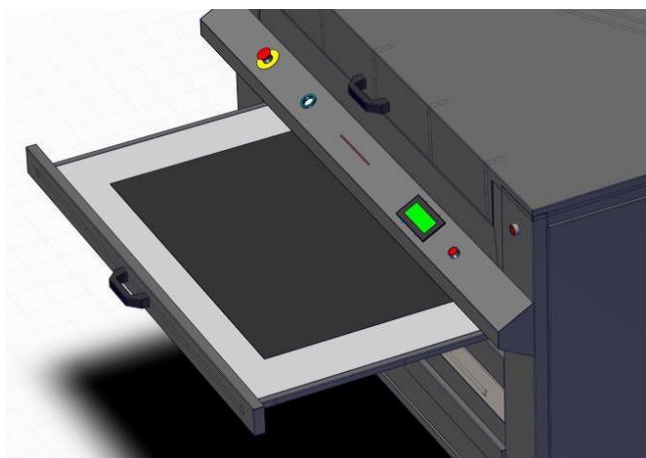



**Flexo Solvent - Letterpress - Flexo Water -  
Washing Systems - Exposers - Filters**